


直动式溢流阀 Directly Relief Valves

型号Model: JRD06-02

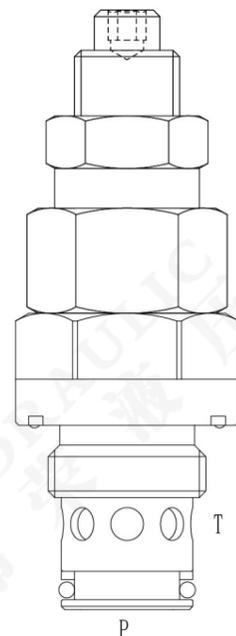

描述Description

螺纹插装、直动型、座阀式溢流阀，用作限压装置以保护液压回路。
Threaded plug-in, direct-acting and seat-valve overflow valve is used as a pressure limiting device to protect the hydraulic circuit.

工作原理Operation

当P口压力未达到弹簧设定压力的80%时，P到T不通，超过80%并压力继续升高时，P到T开始溢流，至弹簧的最高设定压力。

When the pressure at the P-port does not reach 80% of the set pressure of the spring, P-to-T is blocked; when it exceeds 80% and the pressure continues to rise, P-to-T begins to overflow to the highest set pressure of the spring.


特点Features

- 调节器确保弹簧不会被压实。 The regulator ensures that the spring will not be compacted.
- 可选的可选压力范围达160bar (2320psi)。 Optional optional pressure range up to 160bar(2320psi).
- 阀芯和阀套硬质处理、耐用。 The valve core and valve sleeve are hard to handle and durable.
- 压力变化响应快。 Fast response to pressure change.
- 工业常规阀孔。 Industrial conventional valve hole.


技术参数Specifications

- 最高工作压力: 240bar (3480psi)
- 流量: 参见性能曲线
- 内泄漏量: 在75%的开启压力下, 泄漏量 ≤ 10mL/min
- 开启压力定义: 当流量达到公称流量的2.5%时的压力测量值bar
- 闭合压力: 开启压力的90%
- 反向开启压力: ≤ 1.5bar (22psi)
- 过滤精度: 25 μm
- 使用温度: -40℃ ~ 120℃ (标准丁腈橡胶)
-26℃ ~ 204℃ (氟橡胶)
- 介质: 粘度介于7.4 ~ 420cSt (50-2000) ssu的矿物油或具有润滑作用的合成油
- 标准压力范围: 80 ~ 180bar (1160 ~ 2610psi)
180 ~ 240bar (2610 ~ 3480psi)
- Max. Working Pressure: 240bar (3480psi)
- Flow: See performance curve.
- Internal leakage: Under the opening pressure of 75%, the leakage is ≤ 10mL/min.
- Opening Pressure Definition: Pressure measurement when the flow reaches 2.5% of the nominal flow.
- Closing Pressure: 90% of opening pressure
- Reverse Opening Pressure: ≤ 1.5bar(22psi)
- Filtering Accuracy: 25 μm.
- Service Temperature: -40℃ ~ 120℃ (NBR), -26℃ ~ 204℃ (FKM)
- Medium: Mineral oil with viscosity of 7.4 ~ 420 CST (50-2000) ssu or synthetic oil with lubricating function.
- Standard Pressure Range: 80 ~ 180bar (1160 ~ 2610psi)
180 ~ 240bar (2610 ~ 3480psi)


符号Symbol




性能曲线Characteristic

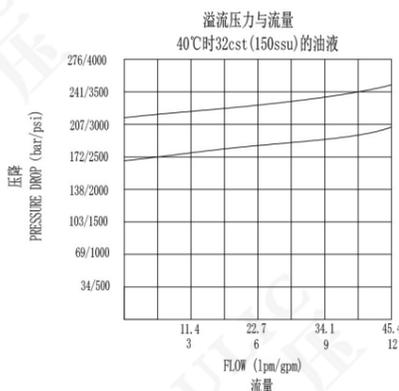

安装尺寸Dimensions

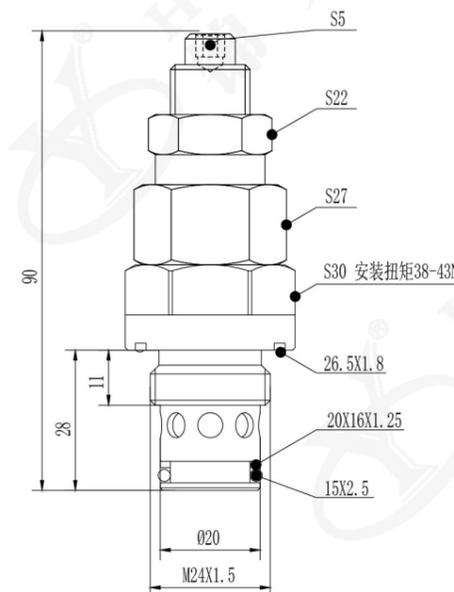

插孔Cavity

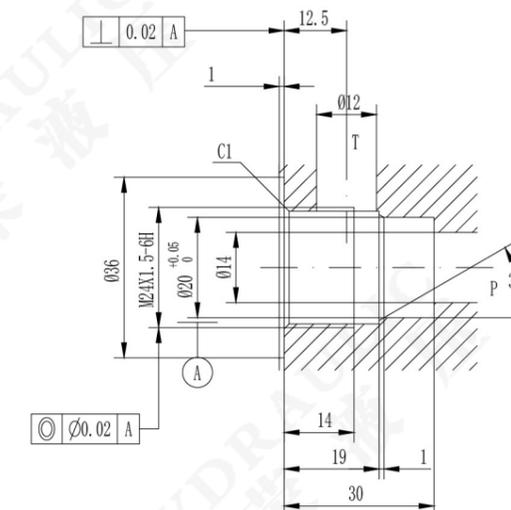

订购选型To Order

JRD06-02- * - * / *** - *

1 2 3 4 5

- ① 型号Model
JRD = 直动式溢流阀
Directly Relief Valves
- ② 调节选件Control
L = 螺杆Screw
C = 防调Anti-adjustment
K = 调扭Torque Adjustment
F = 六角头锁钮
Hexagon Lock Button
O = 螺杆封盖Screw Cap
- ③ 弹簧调压范围Spring Ranges
A = 80 ~ 180bar (1160 ~ 2610psi)
B = 180 ~ 240bar (2610 ~ 3480psi)
- ④ 调定压力Setting In Bar
可调节或指定压力, 例如:
190=190bar
170=170bar
The pressure can be adjusted or specified, Example:
190=190bar
170=170bar
- ⑤ 密封件Seal Kits
N = 丁腈橡胶(NBR)
V = 氟橡胶(FKM)