

直动式溢流阀 Directly Relief Valves

型号Model: JRD06-15

描述Description

螺纹插装、直动型、座阀式溢流阀，用作限压装置以保护液压回路。
Threaded plug-in, direct-acting and seat-valve overflow valve is used as a pressure limiting device to protect the hydraulic circuit.

工作原理Operation

当P口压力未达到弹簧设定压力的80%时，P到T不通，超过80%并压力继续升高时，P到T开始溢流，至弹簧的最高设定压力。

When the pressure at the P-port does not reach 80% of the set pressure of the spring, P-to-T is blocked; when it exceeds 80% and the pressure continues to rise, P-to-T begins to overflow to the highest set pressure of the spring.

特点Features

- 调节器确保弹簧不会被压实。
 - 可选的可选压力范围达299bar (4336psi)。
 - 阀芯和阀套硬质处理、耐用。
 - 压力变化响应快。
 - 工业常规阀孔。
- The regulator ensures that the spring will not be compacted.
 - Optional optional pressure range up to 299bar(4336psi).
 - The valve core and valve sleeve are hard to handle and durable.
 - Fast response to pressure change.
 - Industrial conventional valve hole.

技术参数Specifications

最高工作压力：420bar (6090psi)

流量：参见性能曲线

内泄漏量：在75%的开启压力下，泄漏量 $\leq 100\text{mL/min}$

开启压力定义：当流量达到公称流量的2.5%时的压力测量值bar

闭合压力：开启压力的90%

过滤精度：25 μm

使用温度：-40℃ ~ 120℃ (标准丁腈橡胶)

-26℃ ~ 204℃ (氟橡胶)

介质：粘度介于7.4 ~ 420cSt (50~2000) ssu的矿物油或具有润滑作用的合成油

标准压力范围：101 ~ 175bar (1465 ~ 2538psi)

250 ~ 320bar (3625 ~ 4640psi)

320 ~ 400bar (4640 ~ 5800psi)

Max.Working Pressure:420bar (6090psi)

Flow:See performance curve.

Internal leakage:Under the opening pressure of 75%, the leakage is $\leq 100\text{mL/min}$.
Opening Pressure Definition:Pressure measurement when the flow reaches 2.5% of the nominal flow.

Closing Pressure:90% of opening pressure

Filtering Accuracy:25 μm .


Service Temperature:-40℃~120℃(NBR), -26℃~204℃(FKM)

Medium:Mineral oil with viscosity of 7.4 ~ 420 CST (50~2000) ssu or synthetic oil with lubricating function.


Standard Pressure Range:101 ~ 175bar (1465 ~ 2538psi)

250 ~ 320bar (3625 ~ 4640psi)


320 ~ 400bar (4640 ~ 5800psi)

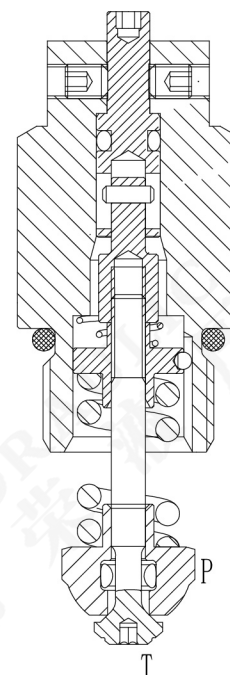


符号Symbol




性能曲线Characteristic

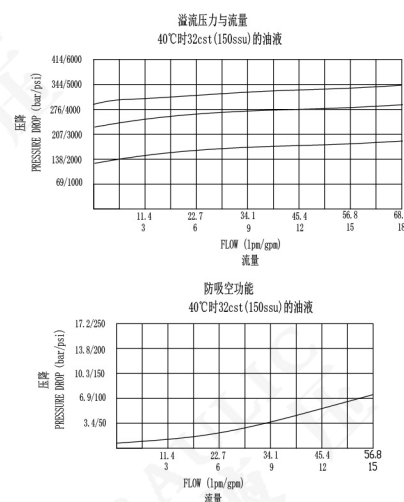

安装尺寸Dimensions

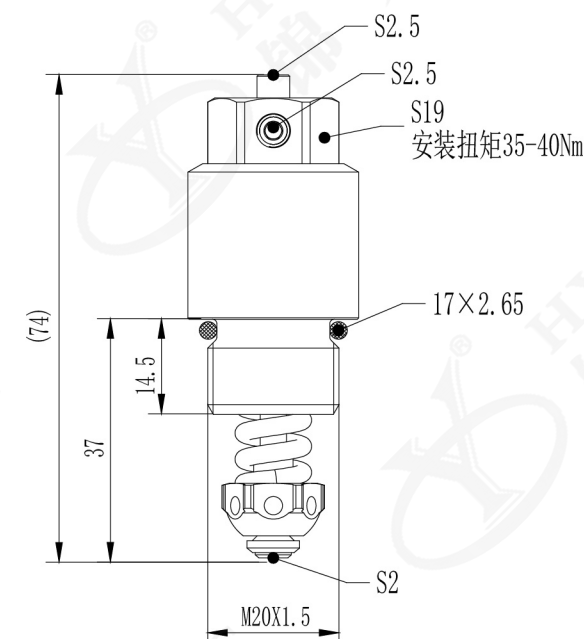

插孔Cavity

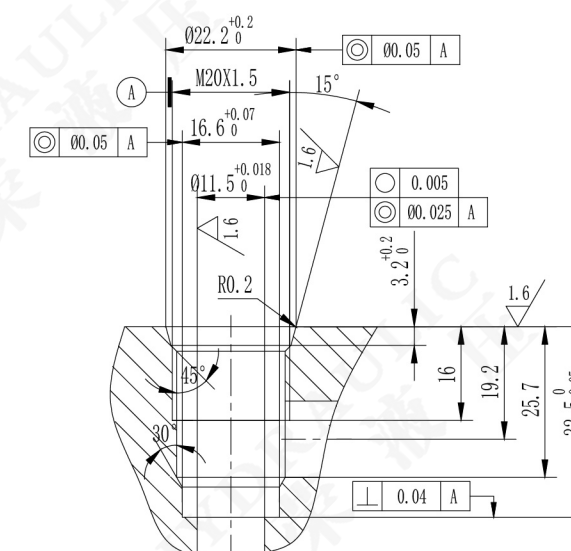

订购选型To Order

JRD06-15- * - * / * - ***

1 2 3 4 5

① 型号Model

JRD = 直动式溢流阀
Directly Relief Valves

② 调节选件Control

L = 螺杆Screw
C = 防调Anti-adjustment
K = 调扭Torque Adjustment
F = 六角头锁钮
Hexagon Lock Button
O = 螺杆封盖Screw Cap

③ 弹簧调压范围Spring Ranges

A = 101 ~ 175bar (1465 ~ 2538psi)
B = 250 ~ 320bar (3625 ~ 4640psi)
C = 320 ~ 400bar (4640 ~ 5800psi)

④ 调定压力Setting In Bar

可调节或指定压力，例如：
190=190bar, 170=170bar
The pressure can be adjusted or specified, Example:
190=190bar, 170=170bar

⑤ 密封件Seal Kits

N = 丁腈橡胶(NBR)
V = 氟橡胶(FKM)