


单向阀 Check Valves

型号Model: JCX10-01

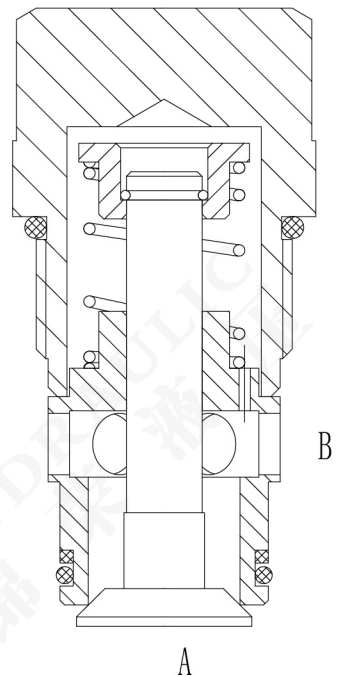

描述Description

螺纹插装式反向型液压单向阀，用作单向截止或负载保持设备。

Threaded plug-in reverse hydraulic one-way valve, used as one-way stop or load holding equipment.

工作原理Operation

此阀使用时，允许液流以很低的压力降从B口到A口，同时阻止液流从A口到B口。

When this valve is used, it allows the liquid flow from port B to port A with very low pressure drop, and prevents the liquid flow from port A to port B at the same time.

特点Features

- 阀芯和阀座硬质处理，耐用，低泄漏。
 - 体积小
 - 快速关闭到位。
 - 工业常规阀孔。
 - Spool and seat hardened for durability and low leakage.
 - Small volume
 - Quickly close in place.
 - Industrial conventional valve hole.

技术参数 Specifications

最高工作压力: 315bar (4568psi)

流量：参见性能曲线

内泄漏量：在200bar（2900psi）压力下，泄漏量 $\leq 1\text{mL/min}$

标准开启压力: 0.8bar (12psi)

过滤精度: 25 μm

使用温度：-40℃ ~ 120℃（标准丁腈橡胶）

-26℃ ~ 204℃ (氟橡胶)

介质：粘度介于7.4~420cSt（50-2000）ssu的矿物油或具有润滑作用的合成油

Max.Working Pressure:315bar (4568psi)

Flow: See performance curve.

Internal leakage: At 200bar (2900psi) , the leakage is $\leq 1\text{mL/min}$.


Standard opening pressure: 0.8bar (12psi)

Filtering Accuracy:25 μ m.


Service Temperature: -40°C~120°C(NBR), -26°C~204°C(FKM)

Medium:Mineral oil with viscosity of 7.4 ~ 420 CST (50~2000) ssu or synthetic oil with lubricating function.


符号Symbol




性能曲线Characteristic

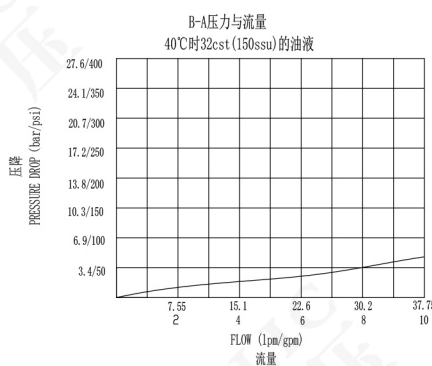

安装尺寸Dimensions

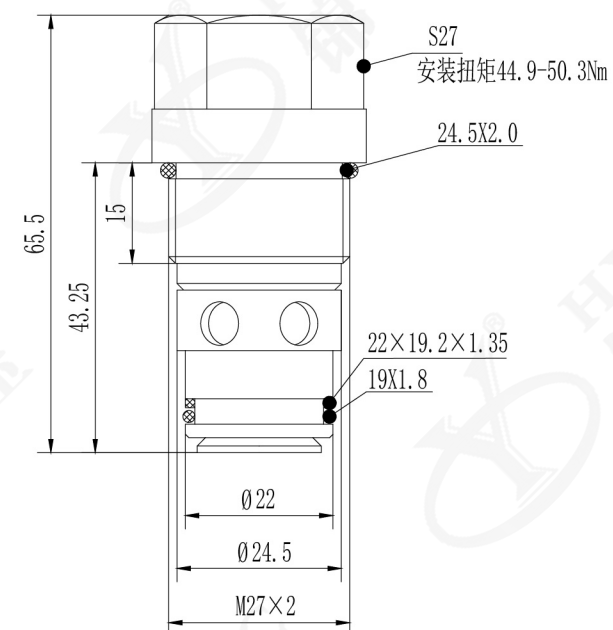

插孔Cavity

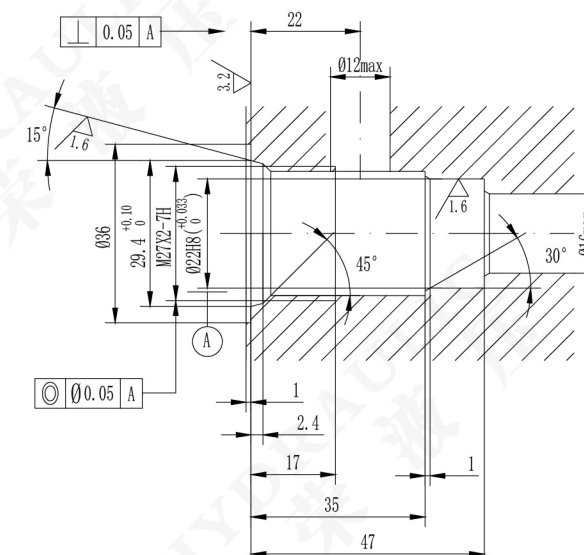

订购选型To Order

JCX10-01- * - *

5

2

3

- 1 型号Model
JCX = 单向阀
Check Valves

- ② 标准开启压力Crack Pressures
A = 0.8bar (12psi)

- 3 密封件 Seal Kits
N = 丁腈橡胶(NBR)
V = 氟橡胶(FKM)